




EYEBEAM
 REVISION: B
 EFFECTIVE: 9/2013

EYEBEAM™

LED DOWNLIGHT FIXTURES FOR ELEVATORS

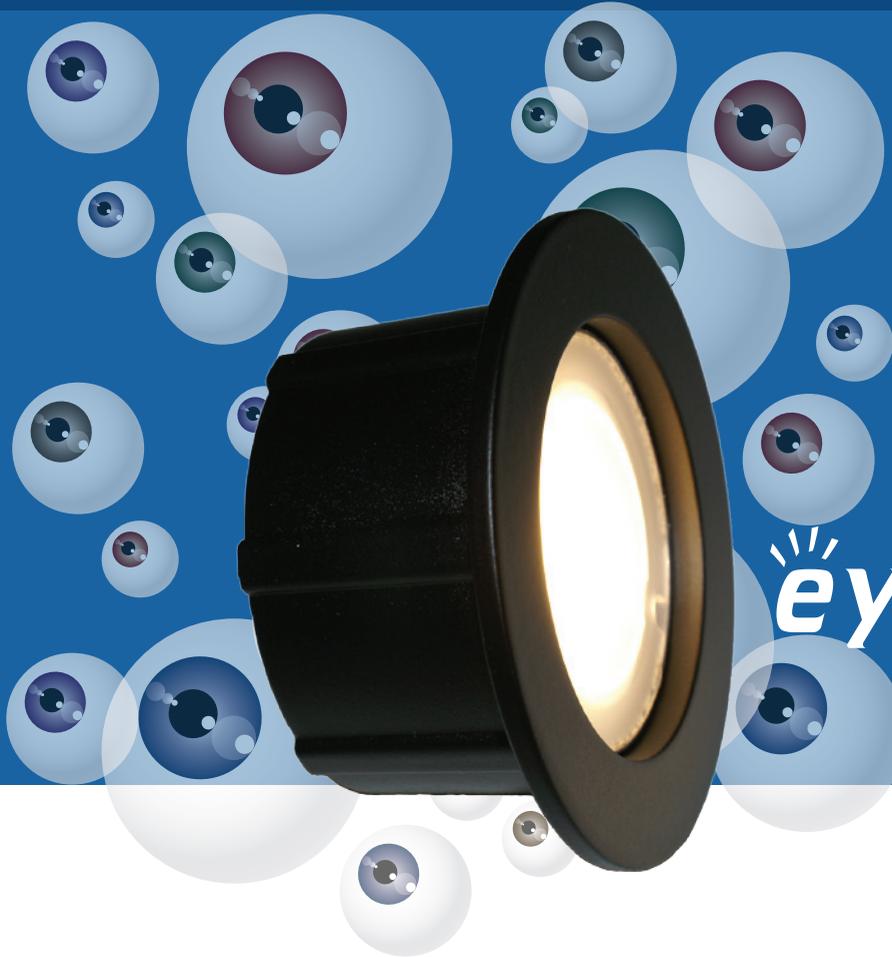

**PATENTED
 PRODUCT**

**OTHER PATENTS
 PENDING**


eyeBEAM™

EYEBEAM by Man-D-Tec®


PATENTED, LOW PROFILE LED LIGHTING SYSTEM, DESIGNED SPECIFICALLY FOR ELEVATOR APPLICATIONS.

Warm white 4 watt LED output that produces 209 lumens per fixture. Systems include a power supply with pre-installed dimmer control and prewired harnesses for easy installation. The low profile fixture height allows the fixtures to be installed in elevator ceilings with low clearance. Our SmoothBeam™ technology produces a wide angle light output with even lighting (eliminates pixilation).

Product Specifications on the back of page.

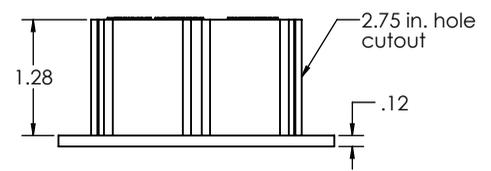

SIDE VIEW



FRONT VIEW

FOR OPTIONS SEE
ACCESSORIES

FOR LIGHT CONFIGURATIONS SEE
LIGHTING MATRIX



448D
 ELEVATOR CONTROL,
 ELEVATOR ACCESSORY
 E329545



1.800.944.6263

WWW.MANDTEC.COM

EYEBEAM

REVISION: B
EFFECTIVE: 9/2013

EYEBEAM™
SPECIFICATIONS

Fixture
(EYEBEAM)

MATERIAL	Aluminum Die Casting		 44BD ELEVATOR CONTROL, ELEVATOR ACCESSORY E329545
DIMENSIONS	1.28" 2.75" 3.04"	Overall Height Cutout Hole (2.50" cutout model available) Overall Diameter <i>Uses Same Hole Cutout Size as Our H-DL™ Fixtures.</i>	
MOUNTING	Retainer Clamp w/ "L" Bracket to Prevent Fixture Rotation		
FINISHES	Black Brushed Polished White Gold	Powder Coat STANDARD #4 Silver Brushed Finish (Option) High Luster #8 Mirror Finish (Option) Powder Coat (Option) Powder Coat (Option)	
OUTPUT	209 Lumens <i>As per LM-79 report by an iAS Accredited Laboratory</i> *Also available in NEUTRAL WHITE (Approx 4,100k)	Warm White (Approx 2,923k)	 LED lighting facts LED Product Partner
LED	Wattage Reflector	4 Watts of LEDs Per Fixture SmoothBeam™ Technology - Wide Angle SAVE EVEN MORE! Pre-Installed Dimmer Control is Included! <i>Adjust from 1 Watt to 4 Watts of LED Output Per Fixture</i>	
LUMINOUS EFFICACY	52.2	Lumens Per Watt (Warm White)	

Scan QR code to see replacement process



TO REPLACE LED MODULE

Once installed, unthread from fixture inside of the cab using our custom extraction tool. This allows future replacements without lowering the cab ceiling. This design is highly vandal resistant, yet allows for simple future replacement.

Power
Supply

MATERIAL	.060 Aluminum	 44BD ELEVATOR CONTROL, ELEVATOR ACCESSORY E329545
DIMMER	INCLUDED	
VOLTAGE	Input: 115 VAC (220VAC Also Available)	

Wiring

SECONDARY (OUTPUT) Pre-harnessed with quick connects at power supply and at each fixture

Emergency
(Optional)

ELS-SB™
Powers (2) two EyeBeam LED fixtures to meet ANSI 17.1 & ASME 17.3-2008 Elevator Code and mounts in EyeBeam power Supply.

EXCEEDS A17.3 4-HOUR RUNTIME CODE REQUIREMENT FOR EMERGENCY LIGHTING.



MAN-D-TEC, INC.

8175 E. PARADISE LANE
SCOTTSDALE, AZ 85260

P. 480.998.0325
F. 480.998.0318

1.800.944.6263

WWW.MANDTEC.COM